


**"home quality" away  
from home**

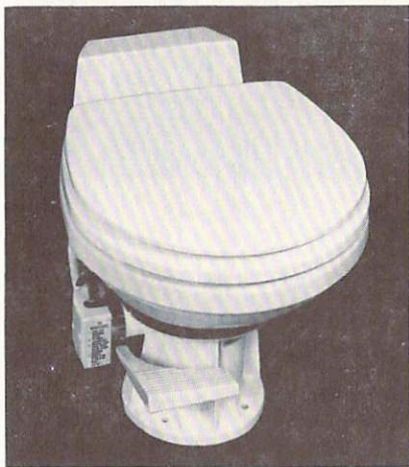

The Mansfield Traveler toilet is ideal for new or replacement installation...offers you features that make it the *quality* choice.

- It flushes with fresh water – is not a recirculating toilet like some others.
- It has a vitreous china bowl that won't stain, fade or discolor – unlike plastic bowls.
- It's dependable, designed to be easy operating and tight sealing for years of use.
- It's efficient, flushing on less than a quart of clean water, saving water and extending travel time between emptying.
- It seals gas tight with a Teflon® ball seal.

And as you'll see, it's easy to install and maintain. The Mansfield Traveler puts "home quality" on the road.

\*Teflon is a Registered Trademark of DuPont Co.



B45.6



**Specially for RV systems.  
Mansfield (Sani Majik) products**


Sani Majik toilet/holding tank deodorant and Sani Majik toilet tissue are both formulated for RV and portable toilet use. They are biodegradable, and come in multi-packs that stow away to be handy. They are available through Mansfield RV product dealers ...or wherever RV supplies are sold.



**Mansfield®**  
PLUMBING PRODUCTS



MANSFIELD SANITARY, INC. / 201 WAYNE ST. / BIG PRAIRIE, OHIO 44611

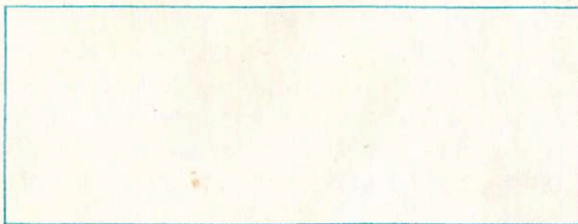

Form No. LRV-112

© 1978 Mansfield Sanitary, Inc.

Printed in U.S.A.



**How to install a  
Traveler™ Toilet**



**Mansfield®**  
PLUMBING PRODUCTS



## Follow these steps for a typical Traveler toilet installation.

Each Mansfield Traveler toilet comes complete with seat and cover, sponge rubber floor seal and mounting bolt package. The following "do it yourself" steps will help make your installation easier.

**1.** To replace an older toilet, first turn off water supply to toilet. Disconnect water line at toilet valve. Unscrew floor bolts and remove toilet. Discard old floor seal and mounting bolts. The old floor flange may be used if the flange is in good condition and it is of the type that can provide four (4) bolt locations. Check the floor flange to be sure that the mounting bolt locations align with the Traveler toilet 4-hole mounting pattern. It may be necessary to remove securing wood screws and turn the flange clockwise to align.

**2.** When installing a new floor flange, screw flange into 3" threaded inlet (or nipple) of holding tank under the floor. Turn by hand until snug and the flange mounting bolts align with Traveler toilet mounting pattern.

**3.** Secure flange to floor using flat head wood screws through counter sunk holes provided in flange. Insert two remaining

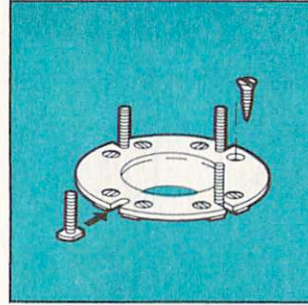


Figure 1

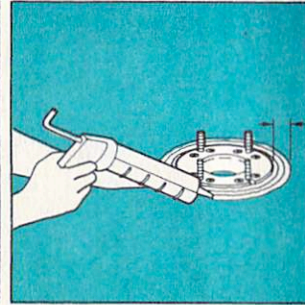


Figure 2

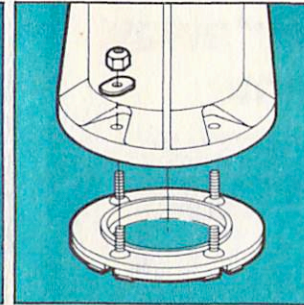


Figure 3

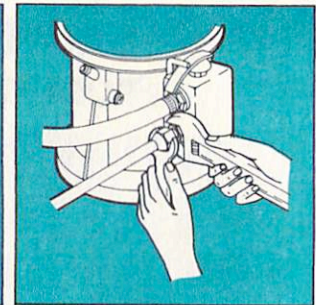


Figure 4

floor bolts into slotted holes in flange. (See Fig. 1).

**4.** If toilet is being installed in shower stall, apply a 1/4" thick x 3/4" wide layer of glazing compound around the circumference of the floor flange. (See Fig. 2).

**5.** Install the provided sponge rubber floor seal by pressing floor bolts up through holes provided in seal.

**6.** Set Traveler toilet in place with bolts protruding up through mounting holes in base. (See Fig. 3).


**7.** Apply the provided oval washers and hex nuts. Snug the nuts down equally with standard 7/16" open end wrench.

**8.** Connect water supply line to water valve using the 3/8" brass flare nut provided. (See Fig. 4). **CAUTION:** Always secure the brass fitting in the valve with a wrench while tightening flare nut to prevent threads being

stripped out of plastic valve. Do not over tighten. When connecting your new Traveler toilet to a plastic water supply tube, an adapter (#7663) should be ordered from Mansfield for this type of installation.

**9.** Remove excess glazing compound from around base in shower stall installation. Turn on water supply and flush toilet to test for leaks.

### Mansfield Model 910 Traveler Toilet Specifications

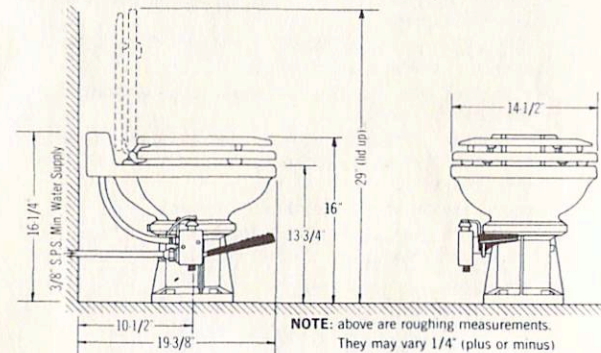

Shipping Weight ..... 910 single pack 30 lb.